


ABSCHLUSSLEISTE AL10X5 END PROFILE AL10X5

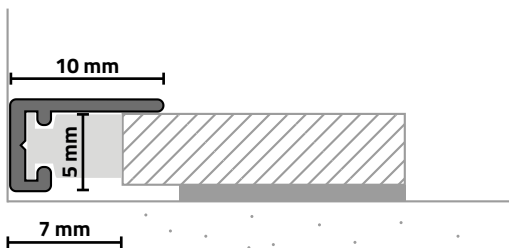

Das Abschlussprofil AL10X5 stellt einen dezenten und innovativen Abschluss von Bodenbelag zu Wand, Fenster(rahmen) oder Treppenstufe her - dort, wo Anschluss- und Dehnfugen bautechnisch eingehalten werden müssen.

The AL10X5 end profile creates a discreet and innovative finish from flooring to wall, window(frame) or stair step - wherever connection and expansion joints have to be maintained in terms of construction efforts.

Geeignet für:
Designböden und LVT

Suitable for:
Design floors and LVT

Für Belagstärken:
Ab 5 mm

For covering thicknesses:
From 5 mm

Breite Anschlussfuge:
5 - 8 mm

Wide connection joint:
5 - 8 mm

Montageart:
Clips (werkzeuglos)

Mounting:
Clips (without tools)

Profillänge:
200 cm

Profile length:
200 cm

Material:
Aluminium eloxiert

Material:
Anodized aluminum

Beschichtung Dicke:
Klasse 15 (DIN EN 17611)

Thickness of anodised layer:
Class 15 (DIN EN 17611)

Kratz- und Verschleißfestigkeit:
Klasse 33 (DIN EN 13329)

Scratch and wear resistance:
Class 33 (DIN EN 13329)

Notwendiges Zubehör:

- Clips (CLIP5)
- Montagehilfe (MH100) - optional

Required accessories:


- Clips (CLIP5)
- Mounting aid (MH100) - optional

Lichtsilber seidenmatt EV1
Light silver satin-finished EV1

Titan seidenmatt C31
Titan satin-finished C31

Bronze seidenmatt C33
Bronze satin-finished C33

Mythossschwarz seidenmatt C35
Myth black satin-finished C35

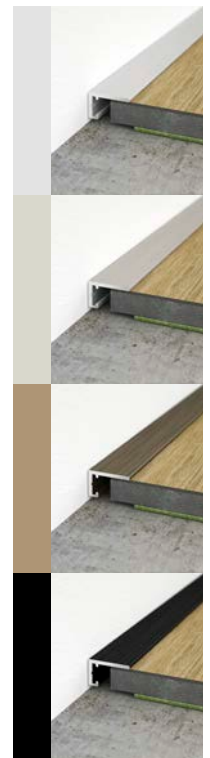


reddot winner 2020
best of the best



reddot winner 2020
best innovative product

ABSCHLUSSLEISTE AL16X5 END PROFILE AL16X5

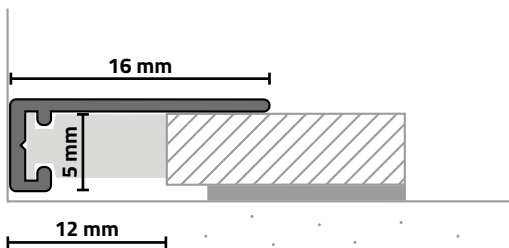

Das Abschlussprofil AL16X5 stellt einen dezenten und innovativen Abschluss von Bodenbelag zu Wand, Fenster(rahmen) oder Treppenstufe her - dort, wo Anschluss- und Dehnfugen bautechnisch eingehalten werden müssen.

The AL16X5 end profile creates a discreet and innovative finish from flooring to wall, window(frame) or stair step - wherever connection and expansion joints have to be maintained in terms of construction efforts.

Geeignet für:
Designböden und LVT

Suitable for:
Design floors and LVT

Für Belagstärken:
Ab 5 mm

For covering thicknesses:
From 5 mm

Breite Anschlussfuge:
6 - 13 mm

Wide connection joint:
6 - 13 mm

Montageart:
Clips (werkzeuglos)

Mounting:
Clips (without tools)

Profillänge:
200 cm

Profile length:
200 cm

Material:
Aluminium eloxiert

Material:
Anodized aluminum

Beschichtung Dicke:
Klasse 15 (DIN EN 17611)

Thickness of anodised layer:
Class 15 (DIN EN 17611)

Kratz- und Verschleißfestigkeit:
Klasse 33 (DIN EN 13329)

Scratch and wear resistance:
Class 33 (DIN EN 13329)

Notwendiges Zubehör:
- Clips (CLIP5)
- Montagehilfe (MH100) - optional


Required accessories:
- Clips (CLIP5)
- Mounting aid (MH100) - optional

Lichtsilber seidenmatt EV1
Light silver satin-finished EV1

Titan seidenmatt C31
Titan satin-finished C31

Bronze seidenmatt C33
Bronze satin-finished C33

Mythossschwarz seidenmatt C35
Myth black satin-finished C35


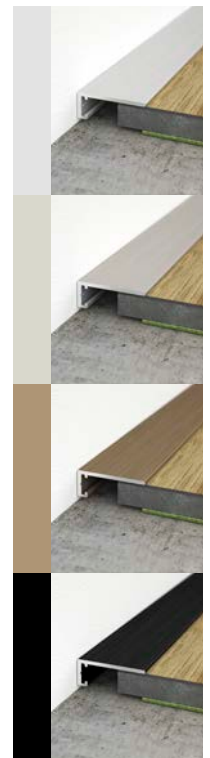


reddot winner 2020
best of the best



reddot winner 2020
best innovative product

ÜBERGANGSPROFIL UL20X5 TRANSITION PROFILE UL20X5

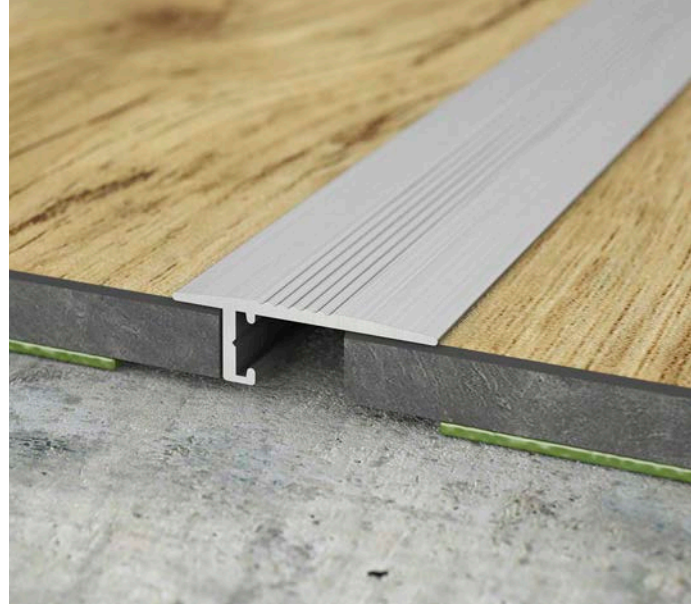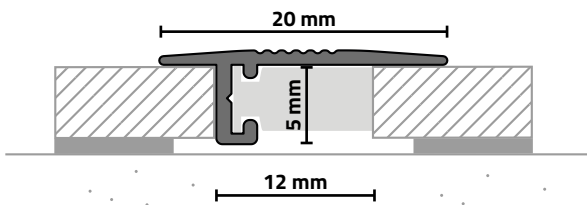

Das Übergangprofil UL20X5 stellt einen dezenten und innovativen Übergang zweier Bodenbeläge gleicher Ebene her - dort, wo Anschluss- und Dehnfugen bautechnisch eingehalten werden müssen.

The transition profile UL20X5 creates a discreet and innovative transition of same level floorings - wherever connection and expansion joints have to be maintained in terms of construction efforts.

Geeignet für:
Designböden und LVT

Suitable for:
Design floors and LVT

Für Belagstärken:
Ab 5 mm

For covering thicknesses:
From 5 mm

Breite Übergangsfuge:
5 - 13 mm

Wide transition joint:
5 - 13 mm

Montageart:
Clips (werkzeuglos)

Mounting:
Clips (without tools)

Profillänge:
200 cm

Profile length:
200 cm

Material:
Aluminium eloxiert

Material:
Anodized aluminum

Beschichtung Dicke:
Klasse 15 (DIN EN 17611)

Thickness of anodised layer:
Class 15 (DIN EN 17611)

Kratz- und Verschleißfestigkeit:
Klasse 33 (DIN EN 13329)

Scratch and wear resistance:
Class 33 (DIN EN 13329)

Notwendiges Zubehör:

- Clips (CLIP5)
- Montagehilfe (MH100) - optional

Required accessories:


- Clips (CLIP5)
- Mounting aid (MH100) - optional

Lichtsilber seidenmatt EV1
Light silver satin-finished EV1

Titan seidenmatt C31
Titan satin-finished C31

Bronze seidenmatt C33
Bronze satin-finished C33

Mythossschwarz seidenmatt C35
Myth black satin-finished C35

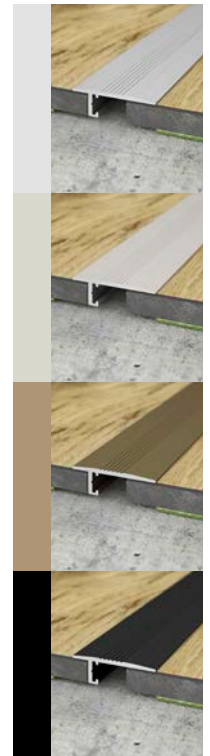

reddot winner 2020
best of the best



reddot winner 2020
best innovative product